









Honda RoadSync

Stay connected effortlessly with the Honda RoadSync app.

Seamlessly link your smartphone to your Dio 125 via Bluetooth.

And enjoy a smooth, hassle-free ride while accessing essential features right at your fingertips.





SINIII KEY With Fismers Technology

Unlock a smarter ride with our H-Smart technology and experience the ultimate convenience and security with the Honda Smart Key.

Smartfind

Searching for your ride in a crowded parking or low-light conditions can be frustrating and the answer back feature solves it.

Smart SAFE

Your Dio 125 stays

secure, even when you're

not around.

Smart START


Start your Dio 125 without even taking the key out of your pocket.

Smartunlock

No need to fumble for your key- Honda Smart Key makes unlocking effortless.



IDLING STOP SYSTEM

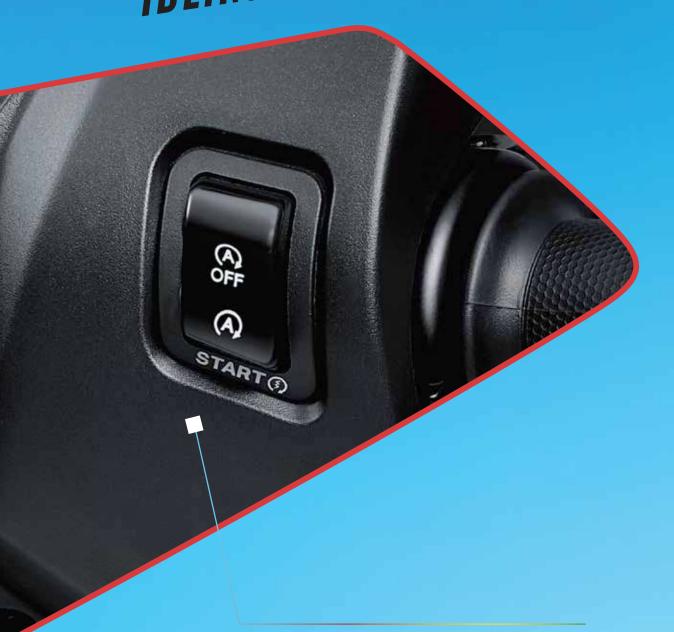

Dio 110's Idling Stop System automatically shuts down the engine during brief stops, reducing unnecessary fuel consumption, and easing rider fatigue.

ADVANCED IDLING STOP SYSTEM



Advanced Idling Stop System Engine automatically comes to a stop whenever the Dio 125 is under 21kmph, saving extrafuel in heavy traffic.





It automatically shuts off the engine for added safety when the side stand is engaged.



The ACG Starter provides a smooth, silent start every time, and reduces engine maintenance.

FUEL INJECTION


The PGM-FI system optimizes fuel and air for efficient combustion, ensuring steady power and better mileage.









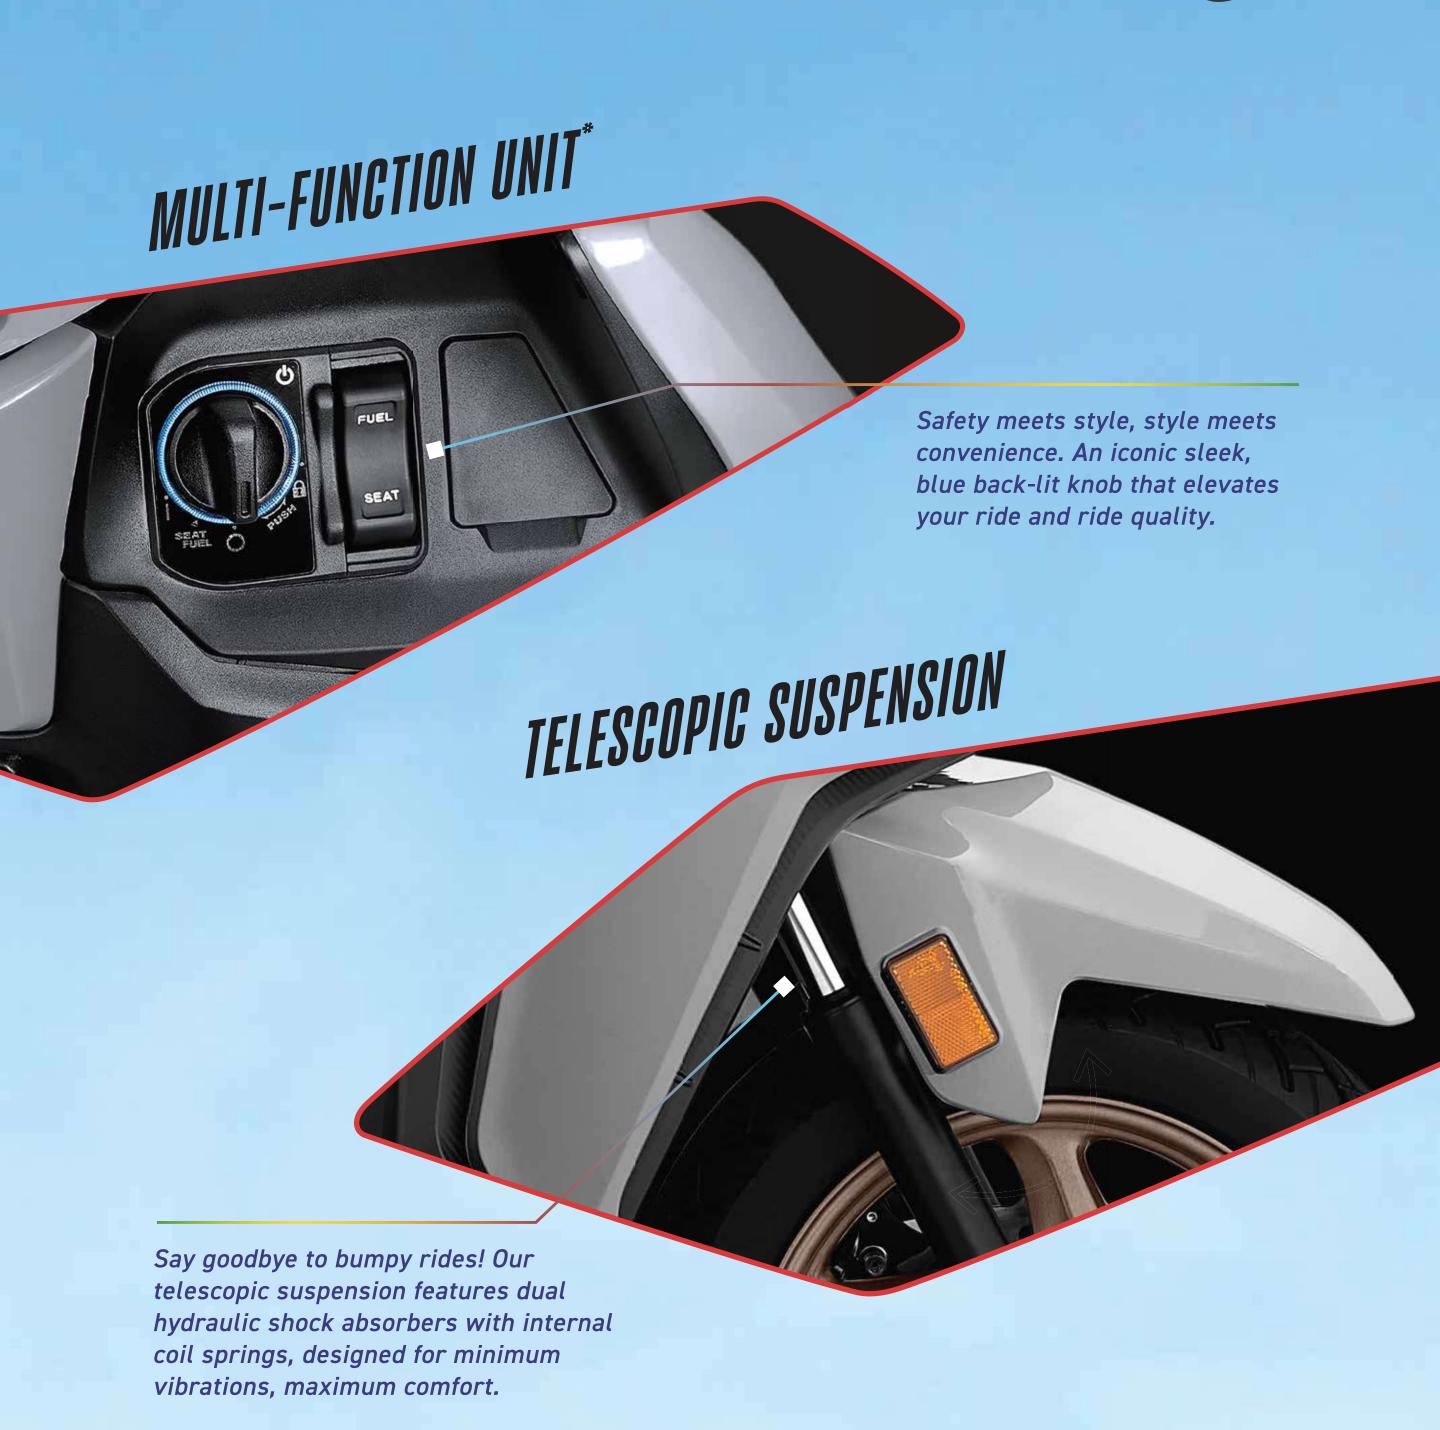









HAVE FUN WITH COLUMNSTA



IMPERIAL RED METALLIC

MAT MARVEL Blue





MAT AXIS GRAY METALLIC

PEARL IGNEOUS BLACK





PEARL IGNEOUS BLACK + PEARL DEEP GROUND GRAY

MAT MARVEL BLUE METALLIC





PEARL DEEP GROUND GRAY (EMBLEM)

PEARL SPORTS YELLOW





PEARL DEEP GROUND GRAY (STRIPE)

IMERIAL RED





PEARL IGNEOUS BLACK

AVAILABLE IN 2 DIFFERENT VARIANTS



Features	STD	DLX
TFT Meter	×	\checkmark
Eco Indicator	×	✓
Live Mileage Indicator	×	✓
Average Fuel Efficiency	×	✓
Range (Distance To Empty)	×	✓
Alloy Wheels	×	✓
Periodic Maintenance Indicator	×	✓
Automatically Adjustable Meter Light	×	✓
& Dark Theme Modes		
Universal USB-C Type Charging	OP	✓
Idling Stop System With Turn Off Switch	✓	✓
Double-Lid External Fuel Fill	✓	✓
Glove Box	✓	✓
ACG Silent Start	✓	✓
CBS With Equalizer	✓	✓



Features	STD	H-SMART
Multi-Function SMART Switch Unit	*	√
Smart Key	*	√
Smart Find	*	√
Smart Unlock	×	✓
Smart Safe	×	✓
Smart Start	×	✓
Bluetooth Connectivity	×	✓
Honda RoadSync App	×	✓
Turn By Turn Navigation With Voice Assist	×	✓
Calling	×	✓
Message - Answer Back	×	✓
Weather Forecast	×	✓
Music Control Through TFT	×	✓
TFT Meter	✓	✓
Eco Indicator	✓	✓
Live Mileage Indicator	✓	✓
Average Fuel Efficiency	✓	✓
Range (Distance To Empty)	✓	✓
Alloy Wheels	✓	✓
Universal USB-C Type Charging	✓	✓
Adv. Idling Stop System With Turn Off Switch	✓	✓
Double-Lid External Fuel Fill	✓	✓
Glove Box	✓	✓
ACG Silent Start	✓	✓
CBS With Equalizer	✓	✓
Disc Brakes	✓	✓
Periodic Maintenance Indicator	✓	✓
Automatically Adjustable Meter Light & Dark Theme Modes	✓	✓

TECHNICAL SPECIFICATION +

Body Dimensions	110 cc	125 cc
_ength	1808 mm	1830 mm
Width	677 mm	707 mm
Height	1151 mm	1172 mm
Nheel Base	1260 mm	1260 mm
Ground Clearance	160 mm	171 mm
Seat Length	650 mm	708 mm
Kerb Weight	Std. & Dlx: 106 kg	104 kg (Smart), 105 kg (Sto
-uel Tank Capacity	5.3 L	5.3 L
Engine		
Гуре	4 Stroke, SI Engine	4 Stroke, SI Engine
Displacement	109.51 cc	123.92 cc
Max Net Power	5.85 kW @ 8000 rpm	6.11 kW @ 6500 rpm
Max Net Torque	9.03 N-m @ 5500 rpm	10.5 N-m @ 5000 грт
Bore	47.0 mm	50.0 mm
Stroke	63.121 mm	63.113 mm
	PGM - FI	PGM - FI
Compression Ratio	10.0:1	10.0:1
Air Filter Type	Viscous Paper Filter	Viscous Paper Filter
Starting Method	Kick / Self	Self (Smart), Kick / Self (Sto
Transmission		
Clutch Type	Automatic Centrifugal Clutch Dry Type	Automatic Centrifugal Clutch Dry Type
Tyres & Brakes		
Tyre Size (Front)	90/90-12 54J	90/90-12 54J
Tyre Size (Rear)	90/100-10 53J	90/100-10 53J
Tyre Type (Front)	Tubeless	Tubeless
Tyre Type (Rear)	Tubeless	Tubeless
Brake Type & Size (Front)	 Drum - 130 mm	Disc - 190 mm
Brake Type & Size (Rear)	Drum - 130 mm	Drum - 130 mm
Frames & Suspensions		
Frame Type	Underbone	Underbone
Front	Telescopic	Telescopic
Rear	Unit Swing	3-Step Adjustable Spring Loaded Hydraulic
Electricals		
System Voltage	12V	12V
System Voltage Battery	12V 5.0 Ah	12V 5.0 Ah

⁺The technical specifications and design of the vehicle may vary according to the requirements and conditions without any notice • Range (distance to empty), real time and average mileage readings may vary as per the variant and riding conditions • Dio 110 and Dio 125 meets Bharat stage VI OBD-2B norms • Product shown in the picture may vary from the actual product available in the market • Accessories shown in the picture are not part of the standard equipment • All features and colours may not be part of all variants • ⁺Conditions apply.

Honda Motorcycle and Scooter India Pvt. Ltd.

Registered Office: Plot No. 1, Sector-03, IMT Manesar, Distt. Gurugram- 122052 (Haryana)

Tel: +91(0)124-2290011, +91(0)6712800, **Fax:** +91(0)124-6712999

Visit us at: www.honda2wheelersindia.com Customer Care: customercare@honda.hmsi.in

Follow us at: f honda2wheelers.in o honda2wheelerin honda2wheelersin honda2wheelerin









Dealer Stamp